




0AID32CL36PSACV

2MP Network Starviz Dome Camera

- 2MP High Video Compression
- Max. resolution: 1920 x 1080
- ICR auto switch, True day/night, ROI coding
- 20 ~ 30m IR night view distance
- Starviz Low Light Camera
- 3D DNR, true WDR, HLC, BLC, Defog
- Supports corridor mode
- Built-in micro SD card slot, up to 128GB
- Built-in Mic.
- Supports Smartphone and Remote monitoring
- DC12V/PoE power supply
- IP67 ingress protection; Support three streams
- Supports Face Detection
- Smart Analytics: Abandoned/Missing object detection, Region entrance/exit/intrusion detection, Line crossing detection, Video tampering detection, Scene change detection, Crowd density detection, Heat map, Human/Vehicle counting, Human tracking

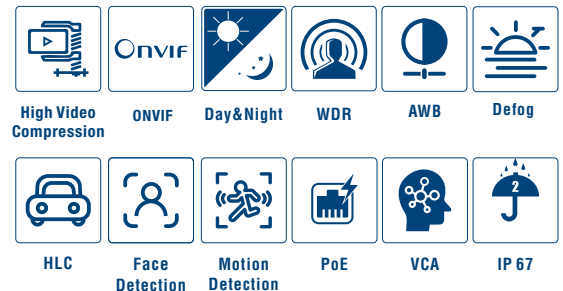

OZONE SECUTECH PRIVATE LIMITED

Operations Office : Plot No. 548, Udyog Vihar Phase V, Gurugram, Haryana, 122016

Email : customercare@ozonsecutech.com | Website : www.ozonsecutech.com



OAID32CL36PSACV

2MP Network Starviz Dome Camera

SPECIFICATIONS

Specifications	Model	OAID32CL36PSACV
Camera		
Image Sensor		1/2.8" CMOS
Image Size		1920 x 1080
Electronic Shutter		1/25 s ~ 1/100000s
Iris Type		Fixed Iris
Min. Illumination		0.005 lux@F1.6, AGC ON; 0 lux with IR 0.0028 lux@F1.2, AGC ON; 0 lux with IR
Lens		3.6 mm @F1.6, horizontal field of view: 89°
Lens Mount		M12
Wide Dynamic Range		120dB
BLC		Yes
HLC		Yes
Defog		Yes
Digital NR		3D DNR
Angle Adjustment		Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°
Image		
Video Compression		High/Standard Video Compression
Resolution		1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240
Main Stream		60Hz : 1080P / 720P(1 ~ 30fps); 50Hz : 1080P / 720P(1 ~ 25fps)
Sub Stream		60Hz : 720P/D1/CIF (1~30fps); 50Hz: 720P/D1/CIF (1~25fps)
Third Stream		60Hz : D1/CIF/480x240 (1~30fps); 50Hz: D1/CIF/480x240 (1~25fps)
Bit Rate		64 Kbps ~ 6 Mbps
Bit Rate Type		VBR/CBR
Audio Compression		G711A/U
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI		Each ROI to be configured separately
Interfaces		
Network		RJ45
Video Output		No
Audio		1CH audio input ; Built-in Mic x 1
Storage		Built-in micro SD card slot; up to 128GB
Hardware Reset		Yes

Functions	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Supports simultaneous monitoring for up to 10 users and Multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection; SD card error; SD card full
Intelligent Analytics	Object abandoned/missing detection, region entrance/exiting/intrusion detection(human/vehicle classification), line crossing detection(human/ vehicle classification), video tampering detection, scene change detection, face detection, face capture, crowd density detection, heat map, human/vehicle counting, human tracking
General Function	Watermark, IP address filtering, video mask, heartbeat, password protection, non-photosensitive switch, image distortion correction
PoE	Yes
IR Distance	20 ~ 30 m
Ingress Protection	IP67
Others	
Power Supply	DC12V/PoE
Power Consumption	< 7.5W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95% (non-condensing)
Dimensions (mm)	94.6 x 94.6 x 82.8
Weight (net)	Approx. 0.46 Kg.
Installation	Ceiling mounting (wall mounting available with the junction box and bracket)

DIMENSIONS

