




OPIB75EL28-120PM

5MP Varifocal Network Bullet Camera

- 5MP High Video Compression
- Max. resolution: 2592 × 1944
- 2.8-12mm Motorised Varifocal Lens
- ICR auto switch, True day/night, ROI coding
- 3D DNR, Digital WDR, HLC, BLC, Defog
- 30~50m IR night view distance
- DC12V/PoE power supply
- Supports Smartphone and Remote monitoring
- IP 67 ingress protection; Support three streams
- Intelligent analytics (optional): Object removal detection, Abnormal video signal detection, Line crossing detection and Intrusion detection

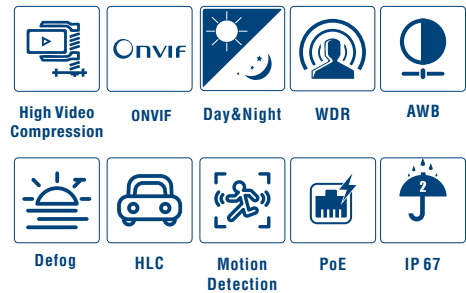

OPIB75EL28-120PM


5MP Varifocal Network Bullet Camera

SPECIFICATIONS

Specifications	Model	OPIB75EL28-120PM
Camera		
Image Sensor		1/2.7" CMOS
Image Size		2592 x 1944
Electronic Shutter		1/25 s ~ 1/100000s
Iris Type		Fixed Iris
Min. Illumination		0.0236 lux@F2.0, AGC ON; 0 lux with IR 0.0085 lux@F1.2, AGC ON; 0 lux with IR
Lens		2.8-12mm @F1.4, horizontal field of view: 90.5°~32.9°
Lens Mount		M12 (Motorised Varifocal)
Wide Dynamic Range		Digital WDR
BLC		Yes
HLC		Yes
Defog		Yes
Digital NR		3D DNR
Angle Adjustment		Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°
Image		
Video Compression		High/Standard Video Compression
Resolution		5MP (2592 x 1944), 4MP (2560 x 1440), 1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240
Main Stream		60Hz : 5MP(1~20fps)/4MP(1~30fps)/1080(1~30fps)/720P(1~30fps) 50Hz : 5MP(1~20fps)/4MP(1~25fps)/1080(1~25fps)/720P(1~25fps)
Sub Stream		60Hz : 720P(1~15fps)/D1(1~30fps)/CIF(1~30fps); 50Hz: 720P(1~12fps)/D1(1~25fps)/CIF(1~25fps)
Third Stream		60Hz: D1/CIF/480 x 240 (1~30fps); 50Hz: D1/CIF/480 x 240 (1~25fps)
Bit Rate		64 Kbps ~ 5 Mbps
Bit Rate Type		VBR/CBR
Audio Compression		No
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI		Each ROI to be configured separately
Interfaces		
Network		RJ45
Video Output		No
Audio		No
Storage		No
Hardware Reset		No

Functions	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPS, QoS
Interface Protocol	ONVIF, GB-T/28181-2011
Storage	Network remote storage
Smart Alarm	Motion detection
General Function	Watermark, IP address filtering, video mask, heartbeat, password protection
Intelligent Analytics	Object removal detection, abnormal video signal detection, intrusion detection and line crossing detection (optional)
PoE	Yes
IR Distance	30 ~ 50 m
Ingress Protection	IP67
Others	
Power Supply	DC12V/PoE
Power Consumption	< 9W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95% (non-condensing)
Dimensions (mm)	217.7 x 80.5 x 80.5
Weight (net)	Approx. 0.65 Kg.
Installation	Ceiling mounting; Wall mounting

DIMENSIONS

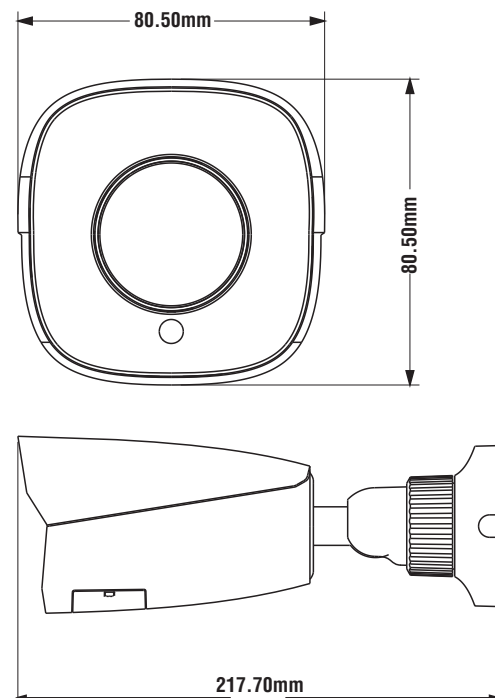

OZONE SECUTECH PRIVATE LIMITED

Operations Office : Plot No. 548, Udyog Vihar Phase V, Gurugram, Haryana, 122016

Email : customercare@ozonesecutech.com | Website : www.ozonesecutech.com