




# OPID52AL28PC

## 2MP Network Dome Camera

- 2MP High Video Compression
- Max. resolution: 1920 x 1080
- ICR auto switch, True day/night and ROI coding
- 3D DNR, digital WDR, HLC, BLC and defog
- 10~20m IR night view distance
- 1CH built-in MIC
- Supports Smartphone and Remote monitoring
- DC12V/PoE power supply
- IP67 ingress protection; Support dual streams
- Intelligent analytics: abnormal video signal detection, line crossing detection and region intrusion detection

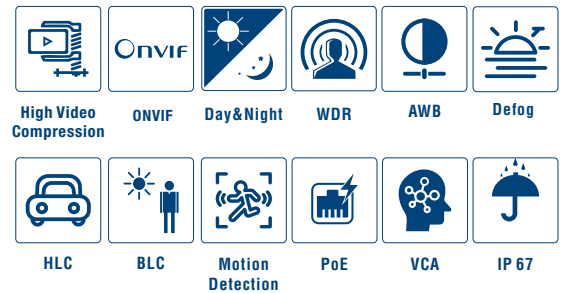

# OPID52AL28PC


## 2MP Network Dome Camera

### SPECIFICATIONS

Specifications	Model	OPID52AL28PC
<b>Camera</b>		
Image Sensor		1/3.2" CMOS
Image Size		1920 x 1080
Electronic Shutter		1/25 s ~ 1/100000s
Iris Type		Fixed Iris
Min. Illumination		0.012 lux@F1.2, AGC ON; 0 lux with IR 0.046 lux@F2.0, AGC ON; 0 lux with IR
Lens		2.8 mm @F2.0, horizontal field of view: 93.7°
Lens Mount		M12
Wide Dynamic Range		Digital WDR
BLC		Yes
HLC		Yes
Defog		Yes
Digital NR		3D DNR
Angle Adjustment		Pan: 0°~360°; Tilt: 0°~75°; Rotation: 0°~360°
<b>Image</b>		
Video Compression		High/Standard Video Compression
Resolution		1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, 480 × 240, CIF
Main Stream		60Hz : 1080P / 720P(1 ~ 30fps); 50Hz : 1080P / 720P(1 ~ 25fps)
Sub Stream		60Hz : D1/CIF/480x240 (1~30fps); 50Hz: D1/CIF/480x240 (1~25fps)
Bit Rate		64 Kbps ~ 6 Mbps
Bit Rate Type		VBR/CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI		Each ROI to be configured separately
Audio Compression		G711A/U
<b>Interfaces</b>		
Network		RJ45
Video Output		No
Audio		1CH Built-in Mic
Storage		No
Hardware Reset		No

Functions	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Supports simultaneous monitoring for up to 3 users and Multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPS, QoS
Interface Protocol	ONVIF
Storage	Network remote storage
Smart Alarm	Motion detection
Intelligent Analytics	Region intrusion detection, video blur detection and line crossing detection
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock
PoE	Yes
IR Distance	10 ~ 20 m
Ingress Protection	IP67
Others	
Power Supply	DC12V(PoE power supply optional)
Power Consumption	< 5W
Operating Environment	- 20 °C ~ 55 °C (-4°F~131°F) Humidity: less than 95% (non-condensing)
Dimensions (mm)	94.8 x 94.8 x 82.8
Weight (net)	Approx. 0.287 Kg.
Installation	Ceiling mounting (wall mounting available with the junction box and bracket)

### DIMENSIONS

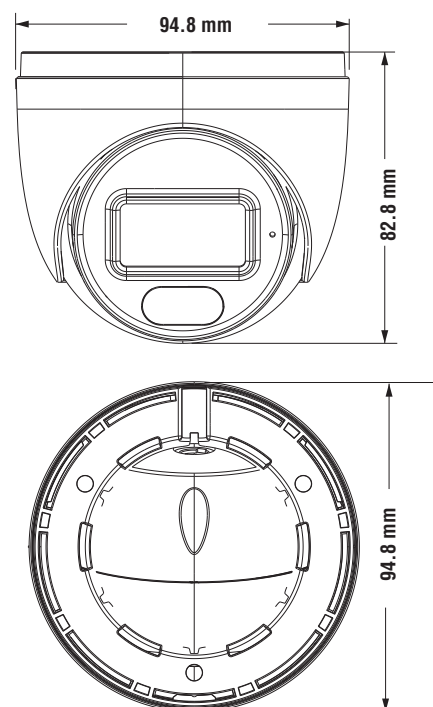

### OZONE SECUTECH PRIVATE LIMITED

Operations Office : Plot No. 548, Udyog Vihar Phase V, Gurugram, Haryana, 122016

Email : [customercare@ozonesecutech.com](mailto:customercare@ozonesecutech.com) | Website : [www.ozonesecutech.com](http://www.ozonesecutech.com)